

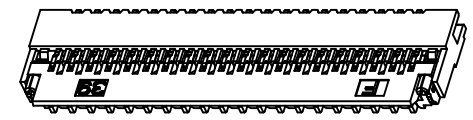

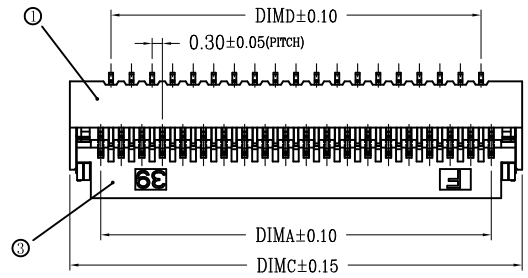
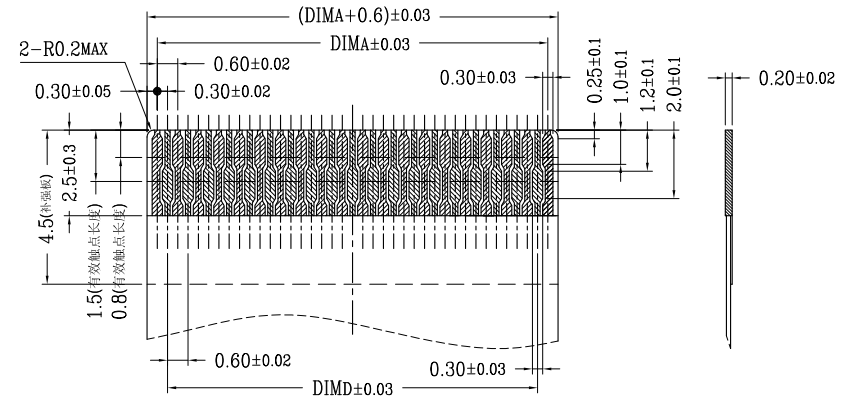
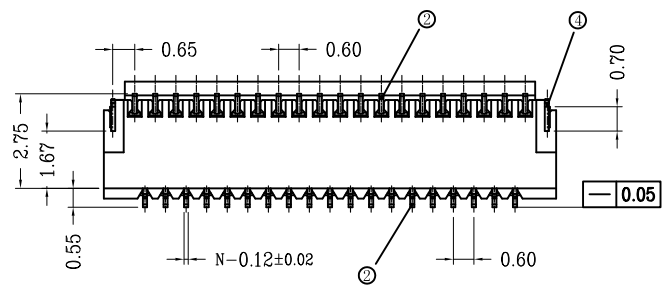


版次	变更摘要	日期	序号	品名	材质
1	增加料号说明	2015/1/28			



①	0.3掀盖胶芯 (H1.0)	LCP UL94V-0 本色
②	0.3掀盖端子 (H1.0)	磷青铜/表面镀金
③	0.3掀盖后盖 (H1.0)	LCP UL94V-0 黑色
④	0.3掀盖焊片 (H1.0)	磷青铜/表面镀锡

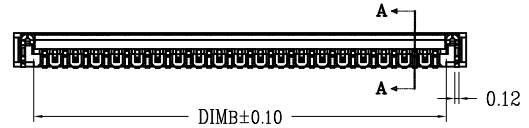


CKT	DIMA	DIMB	DIMC	DIMD
13	3.60	4.24	5.40	3.00
15	4.20	4.84	6.00	3.60
17	4.80	5.44	6.60	4.20
19	5.40	6.04	7.20	4.80
21	6.00	6.64	7.80	5.40
23	6.60	7.24	8.40	6.00
25	7.20	7.84	9.00	6.60
27	7.80	8.44	9.60	7.20
29	8.40	9.04	10.20	7.80
31	9.00	9.64	10.80	8.40
33	9.60	10.24	11.40	9.00
35	10.20	10.84	12.00	9.60
37	10.80	11.44	12.60	10.20
39	11.40	12.04	13.20	10.80
41	12.00	12.64	13.80	11.40
43	12.60	13.24	14.40	12.00
45	13.20	13.84	15.00	12.60
47	13.80	14.44	15.60	13.20
49	14.40	15.04	16.20	13.80
51	15.00	15.64	16.80	14.40
53	15.60	16.24	17.40	15.00
55	16.20	16.84	18.00	15.60
57	16.80	17.44	18.60	16.20
59	17.40	18.04	19.20	16.80
61	18.00	18.64	19.80	17.40
63	18.60	19.24	20.40	18.00
65	19.20	19.84	21.00	18.60
67	19.80	20.44	21.60	19.20
69	20.40	21.04	22.20	19.80
71	21.00	21.64	22.80	20.40

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -55° C~85° C.
3. 接触电阻: ≤40mΩ (DC20mV最大电压/10mA最大电流).
4. 额定电压: 30V AC.
5. 额定电流: 0.2A DC.
6. 绝缘电阻: ≥50MΩ (DC500V).

适用扁平线

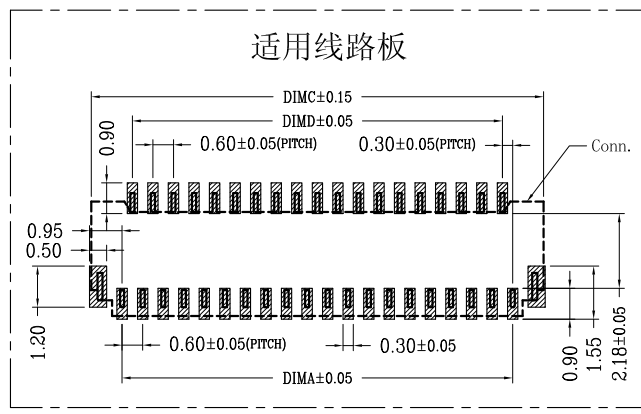

一般公差 (TOLERANCE)
 X ±.50 XX ±.10
 X ±.20 XXX ±.05
 ANGLES ±1°

东莞市创亿科技有限公司
 DONGGUAN CYCONN TECHNOLOGY CO.,LTD

品名 (TITLE): 0.3 Pitch掀盖卧式下接 (H=1.0)
 料号 (DWG.NO): 0.3S-2X-nPWB

制图 (DR):
 校对 (CHKD):
 审核 (APPD):

比例 (SCALE): 1:1
 单位 (UNITS): mm

张数 (SHEET): 1 OF 1
 SIZE: A4
 REV: A