
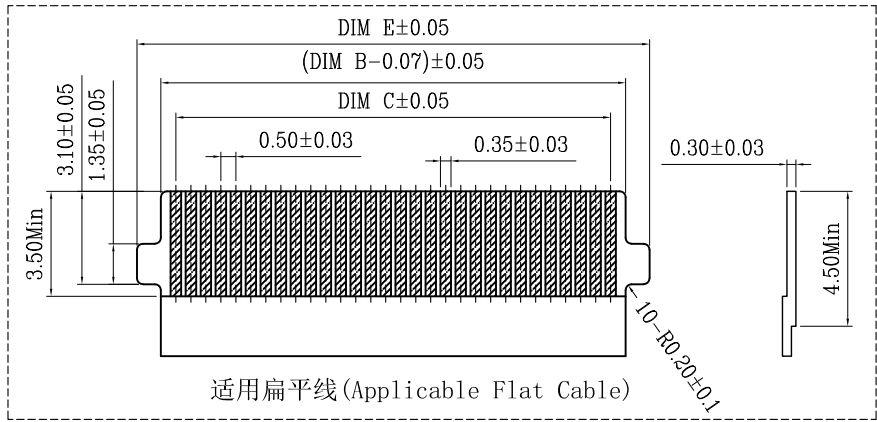
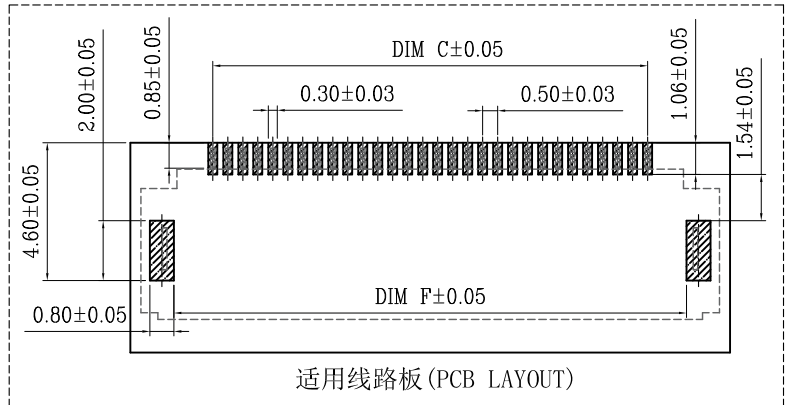
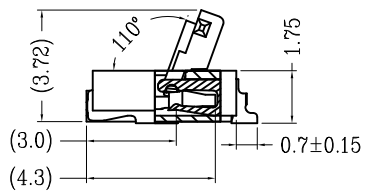
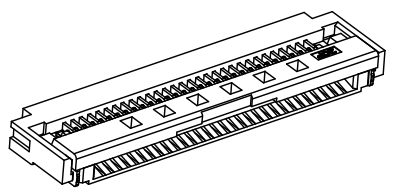



版次	更新摘要	日期	序号	品名	材质
0	新图制定	2022.3.25			

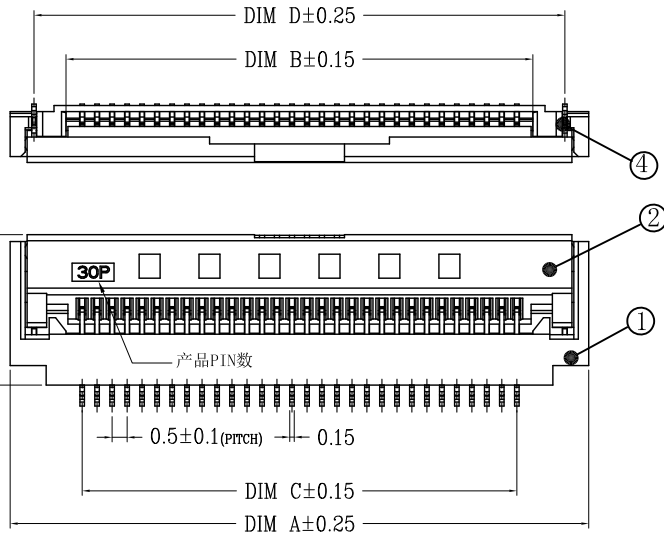

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~85° C.
3. 额定电流: 0.5A
4. 额定电压: 50V, AC.
5. 接触电阻: 50mΩ MAX.
6. 绝缘电阻: 500MΩ Min.
7. 耐电压: 150V AC/1Minute
8. 端子点镀金

CKT	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
5	6.80	3.07	2.00	5.20	4.60	4.60
6	7.30	3.57	2.50	5.70	5.10	5.10
8	8.30	4.57	3.50	6.70	6.10	6.10
10	9.30	5.57	4.50	7.70	7.10	7.10
12	10.30	6.57	5.50	8.70	8.10	8.10
18	13.30	9.57	8.50	11.70	11.10	11.10
22	15.30	11.57	10.50	13.70	13.10	13.10
24	16.30	12.57	11.50	14.70	14.10	14.10
28	18.30	14.57	13.50	16.70	16.10	16.10
30	19.30	15.57	14.50	17.70	17.10	17.10
40	24.30	20.57	19.50	22.70	22.10	22.10
42	25.30	21.57	20.50	23.70	23.10	23.10
44	26.30	22.57	21.50	24.70	24.10	24.10
50	29.30	25.57	24.50	27.70	27.10	27.10
54	31.30	27.57	26.50	29.70	29.10	29.10
56	32.30	28.57	27.50	30.70	30.10	30.10
57	32.80	29.07	28.00	31.20	30.60	30.60
60	34.30	30.57	29.50	32.70	32.10	32.10
64	36.30	32.57	31.50	34.70	34.10	34.10
68	38.30	34.57	33.50	36.70	36.10	36.10
80	44.30	40.57	39.50	42.70	42.10	42.10



一般公差 (TOLERANCE)
 X ±0.50 .XX ±10
 X ±0.20 .XXX ±05
 ANGLES ±1°

东莞市创亿科技有限公司
 DONGGUAN CYCONN TECHNOLOGY CO.,LTD

品名 (TITLE)	0.5 Pitch掀盖卧式下接带扣(H=2.0)业务图			制图 (DR)
料号 (DWG.NO)	0.5S-2K-nPWB			校对 (CHKD)
比例 (SCALE)	1:1	单位 (UNITS)	mm	审核 (APPD)
张数 (SHEET)	1 OF 1	尺寸 (SIZE)	A4	REV