


- SPECIFICATIONS**
- 1.CURRENT RATING: 0.5A .
 - 2.VOLTAGE RATING 60V AC/DC.
 - 3.TEMPERATURE RANGE:-55°C TO +125°C
 - 4.CONTACT RESISTANCE: 80mΩ MAX.
 - 5.INSULATION RESISTANCE:500 MΩ MIN.
 - 6.WITHSTANDING VOLTAGE:150V AC/MINUTE.

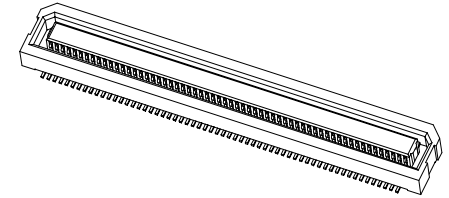

CY3524-*S-W*R**

- CY: CYCONN BTB CONNECTOR SERIES
- 35: HEIGHT:24--2.35H
- 24: 5: 0.5BTB
- ***: PIN PLATING: G:GOLD FLASH
- S: SOCKET
- W: WITH POSITIONING POSTS
- R: WITHOUT POSITIONING POSTS

* 标示是已批量生产的Pin位数

H
* 3.0mm
3.5mm
4.0mm

PIN	A	B
20	8.20	4.50
22	8.70	5.00
30	10.70	7.00
34	11.70	8.00
40	13.20	9.50
50	15.70	12.00
60	18.20	14.50
70	20.70	17.00
* 80	23.20	19.50
* 100	28.20	24.50
* 120	33.20	29.50

东莞市创亿科技有限公司
DONGGUAN CYCONN TECHNOLOGY CO., LTD

制图 (DR):	Jerry 2021.08.21	品名(TITLE):	AXK 0.50mm BTB SOCKET
审核 (CHKD):		料号(PART NO):	CY3524-***S-W*R
核准 (APPD):	Tong 2021.08.21	比例(SCALE):	1:1
		单位(UNITS):	mm
		张数(SHEET):	1 OF 1
		图幅(SIZE):	A4

一般公差
GENERAL TOLERANCE
.X ±0.35
.XX ±0.25
.XXX ±0.10
ANGLES ±1°

修订	修改摘要	签名	日期
SE	REVISION DESCRIPTION	SIGNATURE	DATE

