


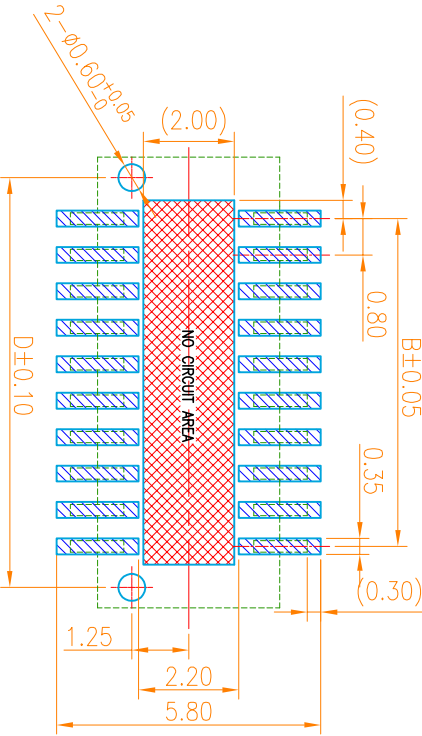
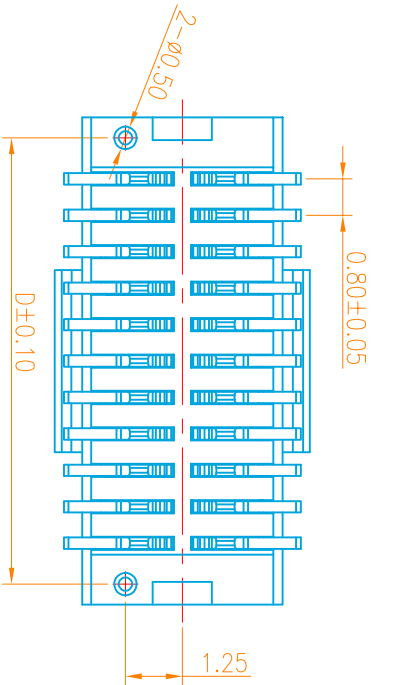

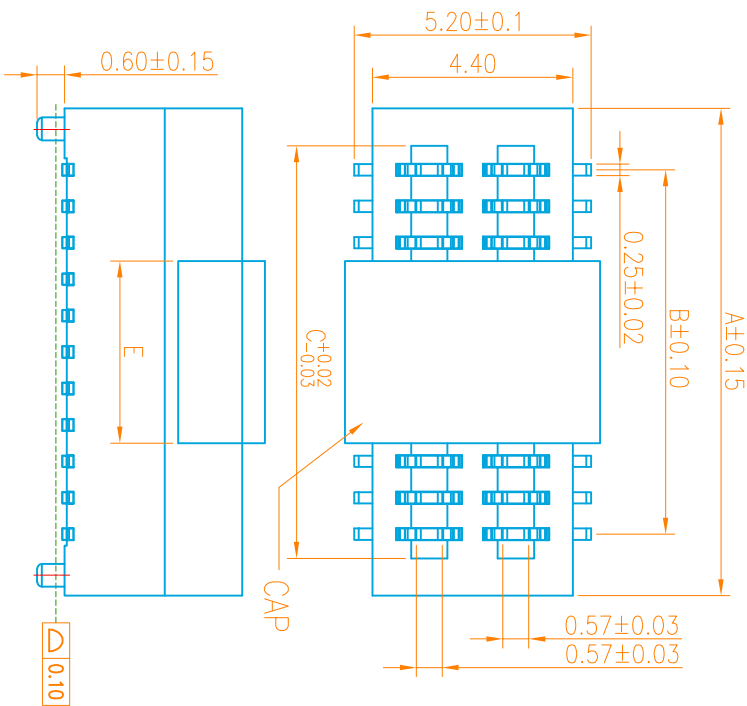


NOTES:

- 1.HOUSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
2.TERMINAL:PHOSPHOR BRONZE
PLATING:1*“GOLD FLASH OVERALL 50~100*“NICKEL UNDER PLATED.
3.CODING INFORMATION: CY330-GxxS-B1R

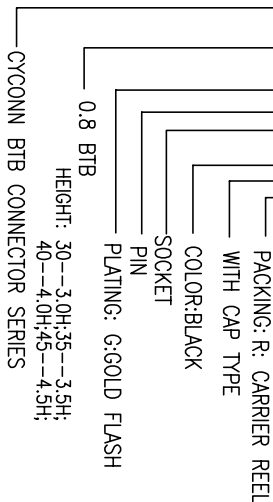

3D VIEW

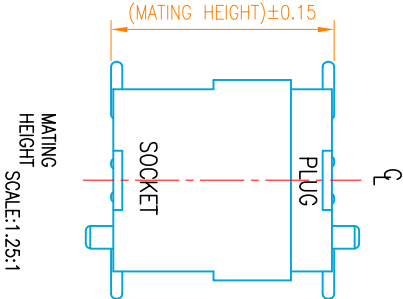

RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

NO of terminals	Dimensions				NO of terminals	Dimensions			
	A	B	C	D		A	B	C	D
4	3.50	0.80	1.86	2.60	54	23.50	20.80	21.86	22.60
6	4.30	1.60	2.66	3.40	56	24.30	21.60	22.66	23.40
8	5.10	2.40	3.46	4.20	58	25.10	22.40	23.46	24.20
10	5.90	3.20	4.26	5.00	60	25.90	23.20	24.26	25.00
12	6.70	4.00	5.06	5.80	62	26.70	24.00	25.06	25.80
14	7.50	4.80	5.86	6.60	64	27.50	24.80	25.86	26.60
16	8.30	5.60	6.66	7.40	66	28.30	25.60	26.66	27.40
18	9.10	6.40	7.46	8.20	68	29.10	26.40	27.46	28.20
20	9.90	7.20	8.26	9.00	70	29.90	27.20	28.26	29.00
22	10.70	8.00	9.06	9.80	72	30.70	28.00	29.06	29.80
24	11.50	8.80	9.86	10.60	74	31.50	28.80	29.86	30.60
26	12.30	9.60	10.66	11.40	76	32.30	29.60	30.66	31.40
28	13.10	10.40	11.46	12.20	78	33.10	30.40	31.46	32.20
30	13.90	11.20	12.26	13.00	80	33.90	31.20	32.26	33.00
32	14.70	12.00	13.06	13.80	82	34.70	32.00	33.06	33.80
34	15.50	12.80	13.86	14.60	84	35.50	32.80	33.86	34.60
36	16.30	13.60	14.66	15.40	86	36.30	33.60	34.66	35.40
38	17.10	14.40	15.46	16.20	88	37.10	34.40	35.46	36.20
40	17.90	15.20	16.26	17.00	90	37.90	35.20	36.26	37.00
42	18.70	16.00	17.06	17.80	92	38.70	36.00	37.06	37.80
44	19.50	16.80	17.86	18.60	94	39.50	36.80	37.86	38.60
46	20.30	17.60	18.66	19.40	96	40.30	37.60	38.66	39.40
48	21.10	18.40	19.46	20.20	98	41.10	38.40	39.46	40.20
50	21.90	19.20	20.26	21.00	100	41.90	39.20	40.26	41.00

东莞市创亿科技有限公司
DONGGUAN CYCONN TECHNOLOGY CO., LTD

RoHS
Compliant
2013/5/EC





修订	修改摘要	签名	日期
SR	REVISION DESCRIPTION	SIGNATURE	DATE

一般公差	公差
尺寸	±0.10
角度	±0.05
位置	±0.05
形状	±0.05



制程 (DR):	品名 (TYPE):	料号 (PART NO.):	单位 (UNITS):	张数 (SHEET):	图幅 (SIZE):
审核 (CHK):	0.8mm 双槽BTB SOCKET	CY3XX-GxxS-B1R	1 OF 1		A4
批准 (APP):		比例 (SCALE):	mm		

NOTES:



- 1.HOUSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
2.TERMINAL:PHOSPHOR BRONZE
PLATING:1*“GOLD FLASH OVERALL 50~100*“NICKEL UNDER PLATED.
3.CODING INFORMATION: CY330-GXXS-B1R

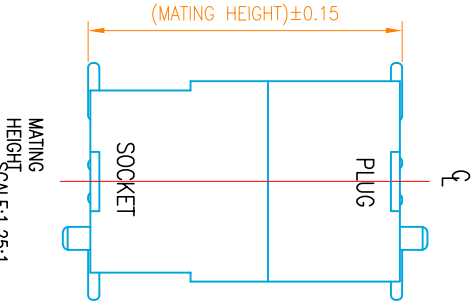

PACKING: R: CARRIER REEL
WITH CAP TYPE
COLOR:BLACK
SOCKET
PIN
PLATING: G:GOLD FLASH
0.8 BTB
HEIGHT: 30--3.0H;35--3.5H;
40--4.0H;45--4.5H;
CYCONN BTB CONNECTOR SERIES

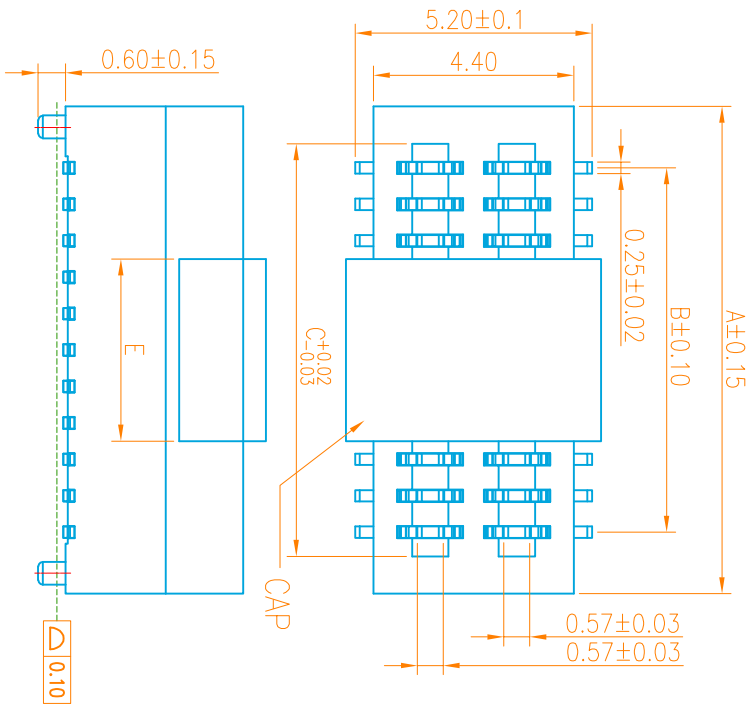

MATING HEIGHT	PLUG (H)	SOCKET (H)	NO.of contacts	Dimensions					NO.of contacts	Dimensions				
				A	B	C	D	E		A	B	C	D	E
7.0	4.0	3.0	4	3.50	0.80	1.86	2.60		54	23.50	20.80	21.86	22.60	
7.5	4.0	3.5	6	4.30	1.60	2.66	3.40		56	24.30	21.60	22.66	23.40	
8.0	4.0	4.0	8	5.10	2.40	3.46	4.20		58	25.10	22.40	23.46	24.20	
8.5	4.0	4.5	10	5.90	3.20	4.26	5.00		60	25.90	23.20	24.26	25.00	
			12	6.70	4.00	5.06	5.80	4.00	62	26.70	24.00	25.06	25.80	
			14	7.50	4.80	5.86	6.60		64	27.50	24.80	25.86	26.60	
			16	8.30	5.60	6.66	7.40		66	28.30	25.60	26.66	27.40	
			18	9.10	6.40	7.46	8.20		68	29.10	26.40	27.46	28.20	
			20	9.90	7.20	8.26	9.00		70	29.90	27.20	28.26	29.00	
			22	10.70	8.00	9.06	9.80		72	30.70	28.00	29.06	29.80	
			24	11.50	8.80	9.86	10.60		74	31.50	28.80	29.86	30.60	
			26	12.30	9.60	10.66	11.40		76	32.30	29.60	30.66	31.40	
			28	13.10	10.40	11.46	12.20		78	33.10	30.40	31.46	32.20	
			30	13.90	11.20	12.26	13.00		80	33.90	31.20	32.26	33.00	
			32	14.70	12.00	13.06	13.80		82	34.70	32.00	33.06	33.80	
			34	15.50	12.80	13.86	14.60	8.00	84	35.50	32.80	33.86	34.60	
			36	16.30	13.60	14.66	15.40		86	36.30	33.60	34.66	35.40	
			38	17.10	14.40	15.46	16.20		88	37.10	34.40	35.46	36.20	
			40	17.90	15.20	16.26	17.00		90	37.90	35.20	36.26	37.00	
			42	18.70	16.00	17.06	17.80		92	38.70	36.00	37.06	37.80	
			44	19.50	16.80	17.86	18.60		94	39.50	36.80	37.86	38.60	
			46	20.30	17.60	18.66	19.40		96	40.30	37.60	38.66	39.40	
			48	21.10	18.40	19.46	20.20		98	41.10	38.40	39.46	40.20	
			50	21.90	19.20	20.26	21.00		100	41.90	39.20	40.26	41.00	

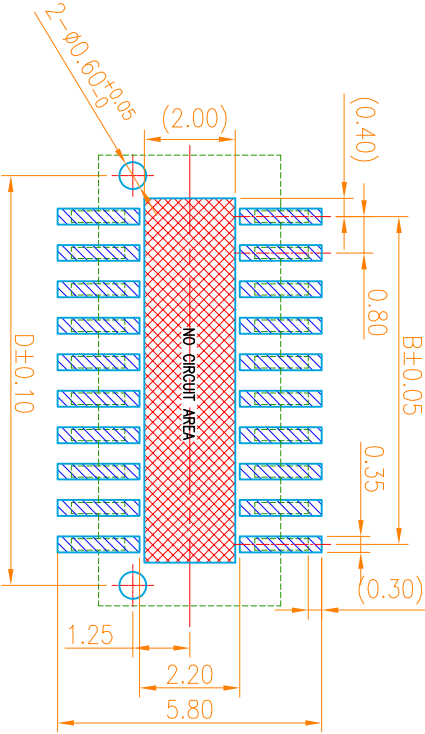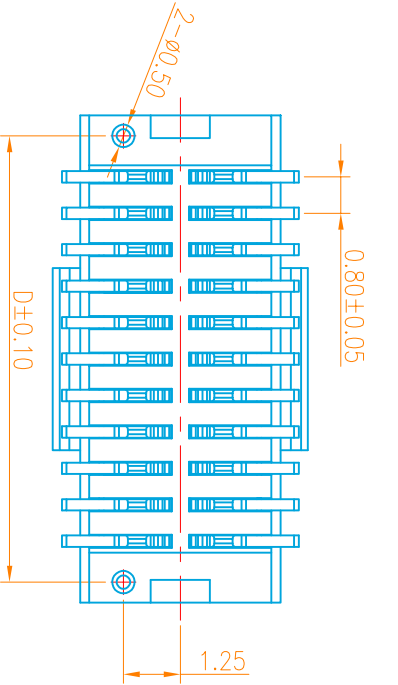


RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

东莞市创亿科技有限公司
DONGGUAN CYCONN TECHNOLOGY CO., LTD

RoHS
Compliant
2013/5/EC



修订	修改摘要	签名	日期	版本
SR	REVISION DESCRIPTION	SIGNATURE	DATE	VER



料号 (PART NO):	品名 (ITEM):	0.8mm 双槽BTB SOCKET
比例 (SCALE):	审核 (CHKD):	
1:8	批准 (APPR):	
单位 (UNITS):	张数 (SHEET):	1 OF 1
mm		
图例 (SIZE):		
A4		